



Fisher 11

DOLLIES

The Model 11 is our smallest Dolly. Lightweight and compact, it is built with the same high quality standards found in all J.L. Fisher products. The Model 11 Dolly shares the same controls and characteristics of the Model 10 Dolly and has a complete line of its own accessories. It operates effortlessly on Square or Round Track, making the Model 11 and Model 10 an excellent two dolly combination.

The Model 11 Dolly is engineered and manufactured to meet the demanding production needs of the motion picture, television and video industries. Compact size, three-way steering and a solid lift beam give operators a wide variety of options. The reliable, quiet, smooth and safe Model 11 requires minimal maintenance.



Fisher 11

Maximum Lift Beam	4'3" (130cm)
Minimum Elevation (standard head)	1'1 ³ / ₄ " (35cm)
Minimum Elevation (long low level head)	3" (7.5cm)
Vertical Beam Travel	2'9 ¹ / ₄ " (85cm)
Lift Capacity	200lbs (91kg)
Lifts Per System Charge	7
Length	3'4" (102cm)
Width (fully operational wheels in)	1'8 ¹ / ₄ " (52cm)
Width (fully operational wheels out)	2'1 ³ / ₄ " (65cm)
Height (operating)	3'3 ¹ / ₂ " (101cm)
Height (folded)	1'11" (59cm)
Minimum Turn Radius (round steering)	1'4" (41cm)
Minimum Turn Radius (conventional steering)	2'9 ¹ / ₂ " (85cm)
Carrying Weight	309lbs (139kg)
Maximum Dolly Load Capacity	900lbs (408kg)

Partners in Production®

VANCOUVER

CALGARY

WINNIPEG

TORONTO

SUDBURY


HALIFAX



Fisher 11

DOLLIES

MAXIMUM LIFT BEAM ELEVATION:		
(LEVEL HEAD UP).....	51.5"	131 CM
(LEVEL HEAD DOWN).....	49.5"	126 CM
MINIMUM LIFT BEAM ELEVATION:		
(LEVEL HEAD UP).....	17.5"	44 CM
(LEVEL HEAD DOWN).....	15.5"	37 CM
(LOW LEVEL HEAD).....	3.625"	9 CM
VERTICAL BEAM TRAVEL.....	34"	86 CM
LIFT BEAM CAPACITY.....	200 LBS.	91KG
LIFTS PER SYSTEM CHARGE.....	7	
LENGTH (LEVEL HEAD FORWARD).....	44.75"	114 CM
LENGTH (LEVEL HEAD REVERSED).....	39.625"	101 CM
WIDTH (FULLY OPERATIONAL STEERING):		
(WHEELS IN).....	20.375"	52 CM
(WHEELS OUT).....	25.75"	65 CM
HEIGHT (OPERATING).....	39.625"	101 CM
HEIGHT (FOLDING).....	23.25"	59 CM
MINIMUM TURN RADIUS		
(ROUND STEERING).....	16.188"	41 CM
(CONVENTIONAL STEERING).....	33.5"	85 CM
CARRYING WEIGHT.....	307 LBS.	139.25 KG

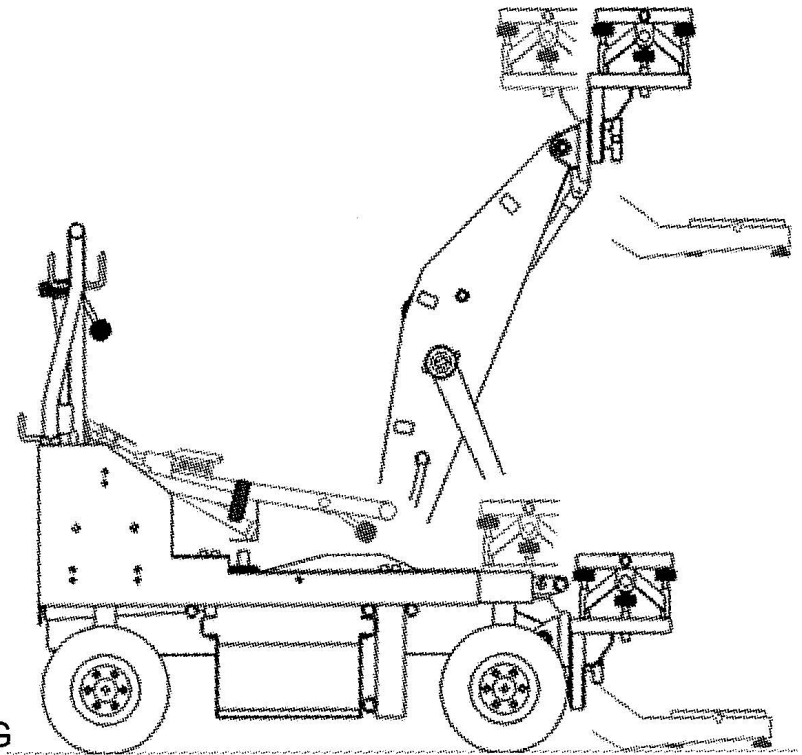

Partners in Production®

VANCOUVER

CALGARY

WINNIPEG

TORONTO

SUDBURY

HALIFAX